



BATTERY OPERATION

SanTec® COOK

The convenient kitchen-tap

- **Complies with the regulations** of the modern foodstuff industry and the hygiene regulations in the health service.
- **Especially adapted for kitchen areas and food industry,** because of special geometry of the outlet.
- **Robust all-metal tap with a pivoted outlet,** which is available in two different heights.
- **Due to 9V battery operation also upgradable at any time (commercially available 9V battery)**
- **Variant with flow regulation for a flow rate up to 18l / min.**




pivoted outlet

SanTec COOK with different functions:


- **Standard**
(Non-contact On - Off, without proximity reflex function)
- **Cleaning stop / Continuous flow**
(additional to Standard, proximity reflex function for releasing a continuous flow or deactivation)
- **Hygiene flush**
after non-use (3 or 24 hours - adjustable) a automatic flushing for 60 secs. will be released

Installation

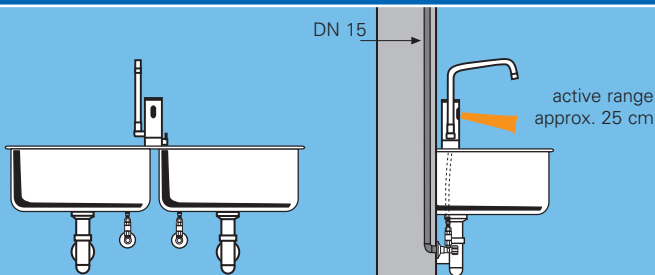


Function

Water flows as long as hands are in the active range




Automatic flushing stop after 1 min. (adjustable)

Hands outside the active range




water flow stops

Pivoted outlet



pivoting range $\pm 45^\circ$

Continuous flow




via close range reflex for 60 secs.



The most important data and dimensions in mm

Technical specifications:

Operating voltage:	Alkali 9V
Battery life:	100.000 flushings (approx. 2 years)
Water connection:	G 3/8" inside thread
Active range:	approx. 25 cm pre-adjusted 15 - 40 cm adjustable
Flushing :	as long as user is in the active range
Security flushing stop:	after 1 min. 30 secs. to 5 min. adjustable
Continuous flow:	via proximity reflex, for 60 secs. 30 secs. to 5 min. adjustable
Drilling workplate:	38 mm
Flow pressure:	0.5 - 6 bar
Static pressure:	max. 8 bar
Water temperature:	max. 70°C
Flow rate:	9l / min or max. 18l / min with flow regulation
Noise class:	I
Pivoted range of outlet:	± 45°

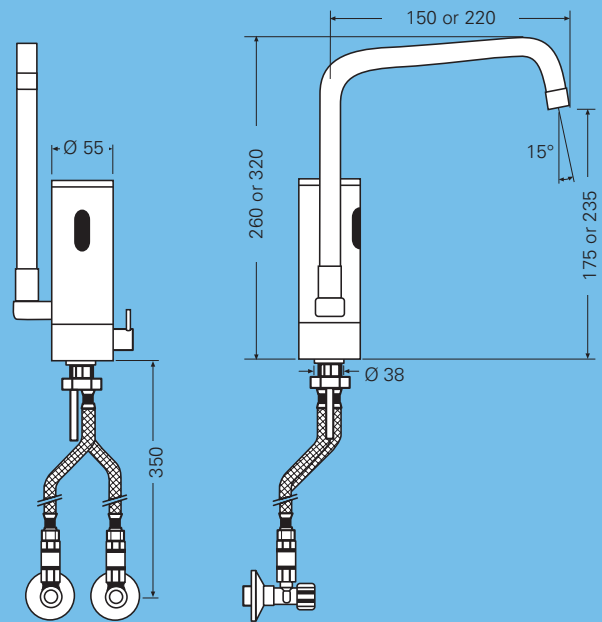

Cleaning note:

Attention! Optical sensors have to be cleaned only with soft clothes, do not use rubbing acrid cleaners!



SanTec COOK complies with the food hygiene regulations (see page 59).

Description

Material

Art.no.

SanTec COOK 9V Outlet 150 mm

Non-contact high-pressure kitchen-tap **with mixer**.

chromium

102 819

SanTec COOK 9V Outlet 220 mm

Non-contact high-pressure kitchen-tap **with mixer**.

chromium

102 826

SanTec COOK 9V with flow regulation

Outlet 150 mm

Non-contact high-pressure kitchen-tap **with mixer and flow regulation** for continuously variable flow quantity regulation.

chromium

102 833


SanTec COOK 9V with flow regulation

Outlet 220 mm

Non-contact high-pressure kitchen-tap **with mixer and flow regulation** for continuously variable flow quantity regulation.

chromium

102 840

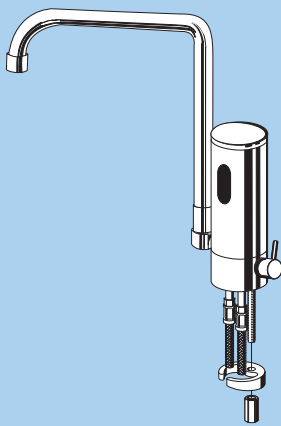

SanTec COOK consists of: armature housing with electronic module and 9V battery, magnetic valve, connection hoses, dirt-filter attachment for corner valve, mounting material and reflux preventers.